



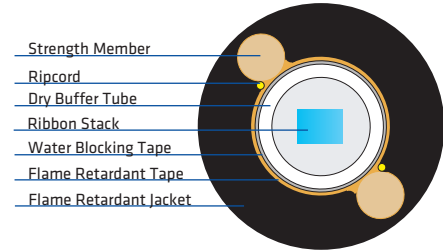

FusionLink™ Indoor/Outdoor Ribbon

Ribbon central tube riser (dry) cable

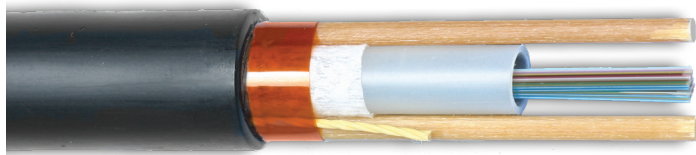

Features and Benefits

Indoor/Outdoor Design

- Saves space and time by eliminating splices at the cable vault
- Can be installed using typical loose tube cable methods and hardware

Flame Retardant Construction

- Riser rated design complies with UL 1666; OFNR & OFN-FT4 rated

Compact Design

- Efficient packaging of higher fiber counts
- Lightweight and easy to handle during installation

Easily Removable Ribbon Matrix

- Allows for ease of stripping and fiber breakout
- Improves mid-span strippability

Precision Ribbon Geometry

- Time and labor savings during fiber splicing

Flexible Buffer Tube

- Superior kink resistance
- Facilitates route management in closures
- Eliminates need for closure transportation tubing

Dry Water-Blocking Technology

- Buffer tube and core are completely dry- no gel
- Permits rapid cable preparation and termination
- Water-blocking materials are easily removed

Performance

- Meets or exceeds the requirements of Telcordia GR-20, Issue 3 and GR-409 & ICEA-S-83-696, which is tested in accordance with relevant EIA-455 series FOTPs for fiber optic cables

Registered Supplier

- ISO 9001, ISO 14001, and TL 9000

PERFORMANCE SPECIFICATIONS		
Bend Radius		
Dynamic	20 x Cable OD	
Static	10 x Cable OD	
Tensile Rating		
	N	lbf
Installation	2700	600
Residual	800	180
Crush Resistance		
	N/cm	lbf/in
Short/ Long Term	220/110	125/63
Temperature Ratings		
	°C	°F
Operation	-40 to +70	-40 to +158
Installation	-30 to +60	-22 to +140
Storage/Shipping	-40 to +75	-40 to +167

FusionLink™ Indoor/Outdoor Ribbon

Ribbon central tube riser (dry) cable

Nominal Design Parameters

Fiber Count		12-48	240-432
Ribbon Count		1-4	10-18
Fibers/Ribbon		12	24
Buffer Tube OD	(mm)	6.2	15.4
	(inches)	0.24	0.61
Cable OD	(mm)	12.3	22.8
	(inches)	0.50	0.90
Cable Weight	(kg/km)	150	364
	(lb/kft)	101	245
Max. Length	(m)	9,458	5,445
	(ft)	31,022	17,864

ORDERING GUIDE The Prysmian Group part number incorporates several significant attributes involving cable design and optical performance. The appropriate part number can be configured using the process described below.

Example: 432 count, riser rated, dry FusionLink™ I/O cable with G.652.D LWP single-mode fiber and 0.40/0.40/0.30 attenuation.



PART NUMBER CONSTRUCTION	
1	LENGTH MARKINGS
F = Feet or M = Meters	
2	PRODUCT FAMILY & CONSTRUCTION
RRIOCDK = Dry FusionLink Indoor/Outdoor (Riser)	
3	FIBER GROUPING
12 = 12f Ribbons (12-48)	
24 = 24f Ribbons (240-432)	

Note: Please refer to the fiber code addendum for additional fiber options, or contact us for help.

FIBER INFORMATION		
5	FIBER TYPE	
SINGLE-MODE		
HB = Single-Mode (ITU G.652 C & D) Low Water Peak		
ES = Enhanced Single-Mode (ITU G.652 C & D)		
CE = Corning™ SMF28e+ Single-Mode		
B1 = Bend-Insensitive Single-Mode (ITU G.657.A1 & G.652.D)		
B2 = Bend-Insensitive Single-Mode (ITU G.657.A2 & .B2, & G.652.D)		
6	FIBER COUNT	
012-048 fibers		
240-432 fibers		
7	FIBER GRADE	
SINGLE-MODE		
Attenuation (dB/km)	Wavelength (nm)	Fiber Type
E1 = 0.40/0.40/0.30	1310/1383/1550	HB, ES, CE, B1, or B2
E3 = 0.35/0.35/0.25	1310/1383/1550	HB, ES, CE, B1, or B2

© DRAKA & PRYSMIAN - Brands of The Prysmian Group. 2016 All Rights Reserved. The information contained within this document must not be copied, reprinted or reproduced in any form, either wholly or in part, without the written consent of Prysmian Group. The information is believed correct at the time of issue. Prysmian Group reserves the right to amend any specifications without notice. These specifications are not contractually valid unless authorized by Prysmian Group. Issued July 2016.