

KFN 9855 iDE

PerfectCool fridge-freezer

maximum convenience thanks to generous large capacity and ice maker.



- Optimum and maintenance-free LED lighting in compartment
- Store food anywhere in the refrigerator - Dynamic cooling
- No icing up of food and no need to defrost thanks to Frost free
- Ice cubes thanks to the plumbed IceMaker
- Door shelves can be cleaned in the dishwasher - ComfortClean

EAN: 4002515227091 / material number: 09472260

Appliance category	
Fridge-freezer	•
Construction type	
Built-in	•
Built-in integrated	•
Door hinge side	right
Design	
Type of lighting	LED
Control panel	
ComfortClean	•
DynaCool	•
NoFrost	•
DuplexCool	•
SoftClose door closing damper	•
IceMaker	•
Plumbed water connection	•
Control	
Fridge compartment can be switched off	•
Super Cooling	•
No. of temperature zones	2
Fridge / Fridge compartment	
Height-adjustable toughened glass shelves	•
No. of shelves	3
Chrome-plated metal bottle rack	•
No. of removable fruit and vegetable drawers	Qty 2
Full width storage racks	2
Inner door racks for bottles	1
Freezer / Freezer compartment	
No. of removable freezer drawers/baskets	Qty 2
Efficiency and sustainability	
Energy Star Qualified	•
Safety	
Optical door alarm	•
Optical temperature alarm	•
Power cut indication for freezer compartment	•
Technical data	
Appliance width in in.(mm)	29 7/8 (757)
Appliance height in in.(mm)	79 7/8 (2,027)
Appliance depth in in.(mm)	24 1/8 (610)
Type of mounting	Fixed door
Climatic classification	SN-T
Fridge compartment volume in l	278
4-star freezer compartment volume in l	122
PerfectFresh zone volume in gal(l)	0.00 (0)
Storage time in case of fault	30
Freezing capacity in h/lbs. (h/kg)	27 (12.0)
Current consumption in milliampere (mA)	2,500
Voltage in V	115
Fuse rating in A	10
Wire length in ft (m)	7 (2.3)


More information at www.MieleUSA.com

For further information please see next page...

KFN 9855 iDE

PerfectCool fridge-freezer

maximum convenience thanks to generous large capacity and ice maker.

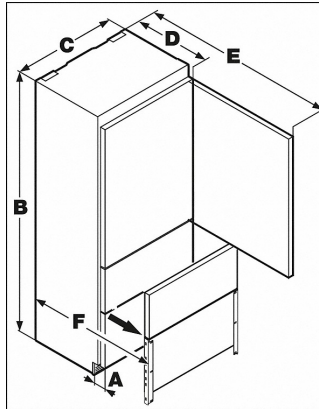

KFN9855iDE with footnote* (installation drawings)

* A = 3" (76 mm)
 B = 79- 13/16" (2027 mm)
 C = 29- 7/8" (757 mm)
 D = 24" (610 mm)
 E = 55 1/4" (1413 mm)
 F = 37- 1/8" (952 mm)